

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/059465 A1

(51) International Patent Classification⁷: **F28F 1/12**,
H01L 23/467

[CN/CN]; Sha Shan Village, Sha Shan Town, Choing Qing
City, Hu Nan Province 417004 (CN).

(21) International Application Number:
PCT/US2004/041677

(74) Agent: **ZEITLER, Robert, J.**; Molex Incorporated, 2222
Wellington Court, Lisle, IL 60532 (US).

(22) International Filing Date:
10 December 2004 (10.12.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200320123780.6
11 December 2003 (11.12.2003) CN

(71) Applicant (*for all designated States except US*): **MOLEX
INCORPORATED** [US/US]; 2222 Wellington Court,
Lisle, IL 60532 (US).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **HU, Jun-Liang**

[Continued on next page]

(54) Title: HEAT CONDUCTION DEVICE

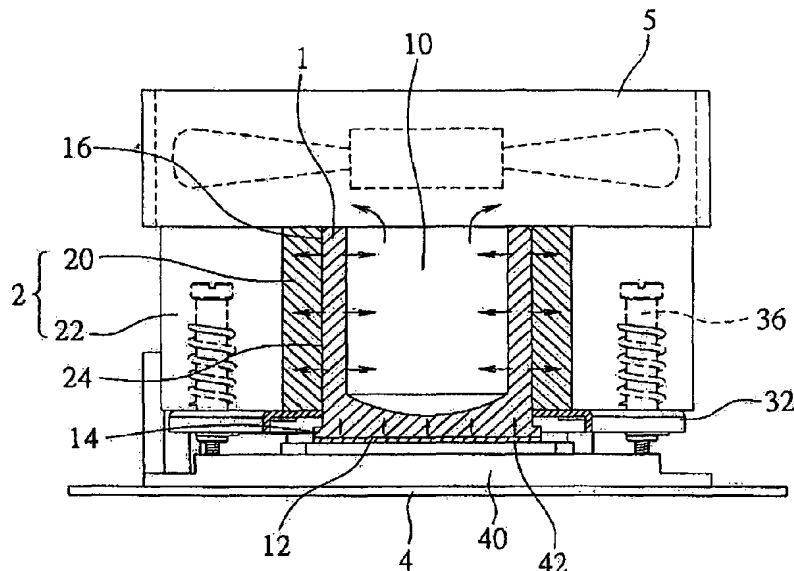

(57) Abstract: A heat conduction device is fixed into a radiator (2) and abutted a heat-generating component (42). This radiator (2) has a through-hole (10). The heat conduction device includes a column body (1). One end of the column body (1) is recessed to form a hollow part in order to increase the radiating surface; the other end of the column body (1) is a contact surface (12). The outer surface of the column body (1) is fixed inside the through-hole (10) of the radiator (2), the contact surface (12) is abutted the heat generating component (42); Due to the formation of the hollow part, the radiating surface is increased, the radiating effect is enhanced, and the cost can be decreased greatly due to the simple configuration of the column body (1).

WO 2005/059465 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*